



*Televes reserves the right to modify the product*

## EuroSwitch/NevoSwitch Quattro amplifier 27/31 dB, 5 inputs (1 satellite)

Amplifier equipped with 5 inputs (one terrestrial and the four Quattro polarities of one satellite) compatible with EuroSwitch and NevoSwitch ranges, that allows increasing the number of users in the installation while optimizing the signal received by each of them. Amplification around 27 dB for terrestrial, and 31 dB for satellite.

**Ref.714509**

**Art.Nr**  
**EAN13**

**MS530VGQ**  
**8424450173398**

### Highlights


- High output level
- Switch for the selection of whether or not to power the terrestrial pre-amplifiers (VDC or OFF)
- Gain (20 dB) and slope (12 dB) individual adjustment
- Power feeding through the VL input/output

### Main features

- Very compact
- Made of zamak
- Input and output colour identification
- 12/18 V power supply
- Low power consumption

## Application example

(Click to see the picture)

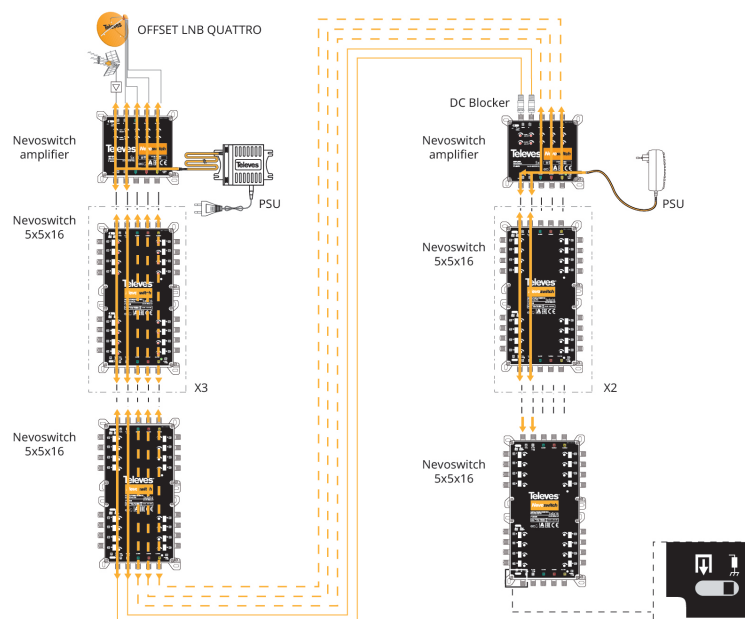

## Technical specifications

Number of inputs		5
Number of outputs		5
Bands		TERR SAT
Frequency range	MHz	47 ... 862 950 ... 2400
Output level	dBμV	114 118
Gain	dB	27 31
Gain adjustment range	dB	0 ... 15
Slope regulation	dB	0 ... 12
Isolation	dB	> 25
Powering	Vdc	12 ... 18
Max current consumption (@12V)	mA	400
Max current consumption (@18V)	mA	265
Max. power consumption	W	4.8
Operating temperature	°C	-5 ... 45
Protection index (IP)		20