## **Televes**®



Televes reserves the right to modify the product

## NevoSwitch 13 inputs - 32 outputs

### When quality matters

Multiswitch equipped with 13 inputs (one terrestrial and 12 for three satellites, each with its four polarities) and 32 user outputs. Can be used as a terminal (star topology) or as a cascade by using a simple switch.

Ref.7	147	05
-------	-----	----

Art.Nr MS1332C

**EAN13** 8424450173220

### **Highlights**

- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for each 8-user group
- Remote power feeding using VL
- Current circulation between all inputs and cascades
- Compatible with return-channel applications
- European design, quality, and manufacturing


#### Main features

- Very compact
- Made of zamak
- Input and output colour identification
- Available ECO mode
- Selector switch to shift between cascade and terminal modes
- 12 V power supply
- Low power consumption

## **Televes**®

### **Application example**

(Click to see the picture)

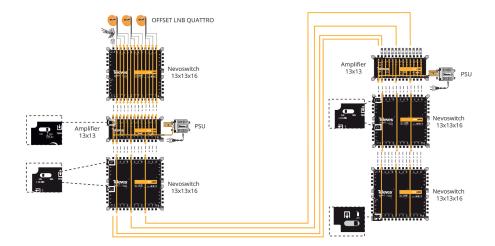

# **Televes**®

## **Technical specifications**

Number of inputs		13	
Number of cascadable outputs		13	
Number of user outputs		32	
Frequency range TERR.	MHz	88 862	
Frequency range SAT.	MHz	950 2400	
Input level TERR.	dΒμV	90	
Input level SAT.	dΒμV	112	
Through losses TERR.	dB	8	
Through losses SAT.	dB	8 18	
Tap losses 18 TERR.	dB	4	
Tap losses 18 SAT.	dB	3	
Tap losses 916 TERR.	dB	6	
Tap losses 916 SAT.	dB	6	
Tap losses 1724 TERR.	dB	8	
Tap losses 1724 SAT.	dB	10	
Tap losses 2532 TERR.	dB	10	
Tap losses 2532 SAT.	dB	14	
Isolation H/V	dB	> 30	
Isolation users	dB	> 25	
Powering	Vdc	12	
Max. current (PSU - LG)	mA	170	
Max. current (PSU - HG)	mA	350	
Max. current (STB)	mA	40	
Operating temperature	°C	-5 45	
Protection index		20	