



Televes reserves the right to modify the product

NevoSwitch amplifier 13 inputs 27/31 dB

NevoSwitch amplifier equipped with 13 inputs (one terrestrial and the four polarities of three satellites) that allows increasing the number of users in the installation while optimizing the signal received by each of them. Around 27 dB and 31 dB amplification in terrestrial and satellite respectively. Compatible with the return channel (passive).

Ref.714709

Art.Nr

MS1327VGQ

EAN13

8424450173510

Highlights


- High output level
- Switch for the selection of whether or not to power the terrestrial pre-amplifiers (VDC or OFF)
- Gain (20 dB) and slope (12 dB) individual adjustment
- Power feeding through the VL input/output

Main features

- Very compact
- Made of zamak
- Input and output colour identification
- 12 V power supply
- Low power consumption

Application example

(Click to see the picture)

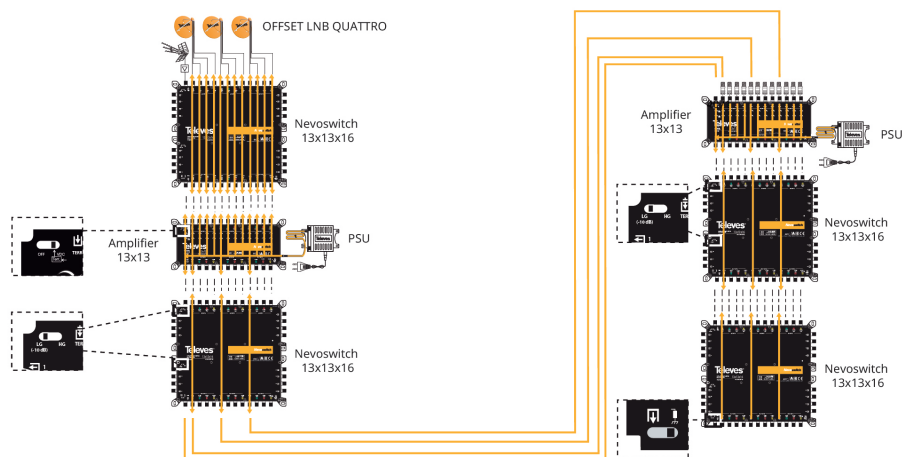

Technical specifications

Number of inputs		13
Number of outputs		13
Bands		TERR SAT
Frequency range	MHz	88 ... 862 950 ... 2400
Output level	dBμV	112 119
Gain	dB	27 30
Gain adjustment range	dB	0 ... 20
Slope regulation	dB	0 ... 12
Isolation	dB	> 30
Powering	Vdc	12 ... 18
Max current consumption (@12V)	mA	865
Max current consumption (@18V)	mA	580
Max. power consumption	W	10.4
Operating temperature	°C	-5 ... 45
Protection index (IP)		20