



Televes förbehåller sig rätten att ändra produkten

Transcoder/Streamer Live Plus

Televes multiscreen transcoder includes two functions on a single device: transcoding and streaming, enabling to transcode live content and stream it through HLS, UDP or RTP.

It allows streaming television channels to any device (Smartphones, Tablets, STBs, PCs, Smart TVs...) through any kind of network.

Ref.832204

Art.Nr

ATRANSPLUS

EAN13



8424450208175

Står Ut För

- It supports different architectures and configuration modes, like an all-in-one configuration where a single equipment will simultaneously behave as a transcoder and a streamer.
- Equipment reconfiguration. Depending on the requirements of the project, the device can be configured as a transcoder, a streamer or both simultaneously, sharing the resources.
- Native multi-device player. The web player is optimized to use the HW decoding resources of each specific device, improving performance and optimizing power consumption.
- Players consistent with Casting devices. The web players, of the suitable devices, allow sending contents to casting devices like Chromecast or Apple TV.
- Responsive web tool. All management and configuration of the equipment can be carried out from a web interface that adapts to any device.
- Output resolutions up to 1080p.
- Adaptive streaming. The video quality will dynamically adapt to the network capacity, delivering the highest possible quality at any time.
- It supports the most popular codecs that are being used currently for video streaming, including HEVC, allowing for an even higher optimization of the network resources. Primarily designed for use on LTE networks.
- Fully scalable. A tool with multiple node management capacity. New equipment hot-plug capability.

Applikationsexempel

(Klicka för att se bilden)

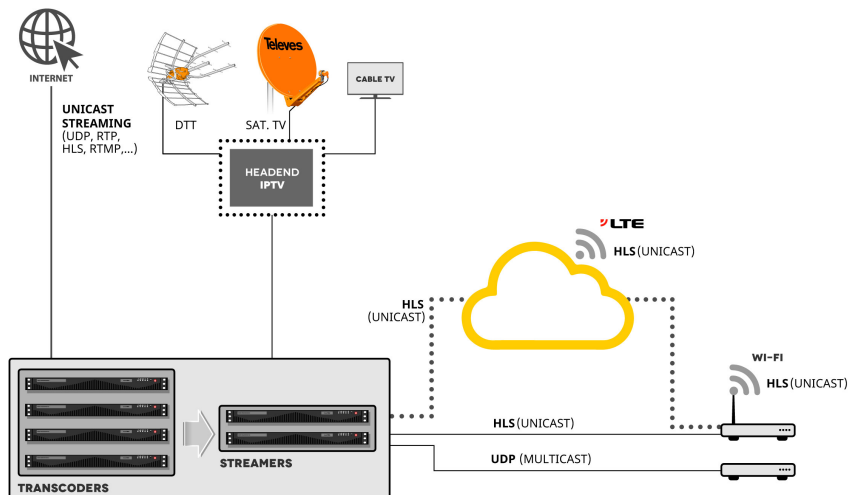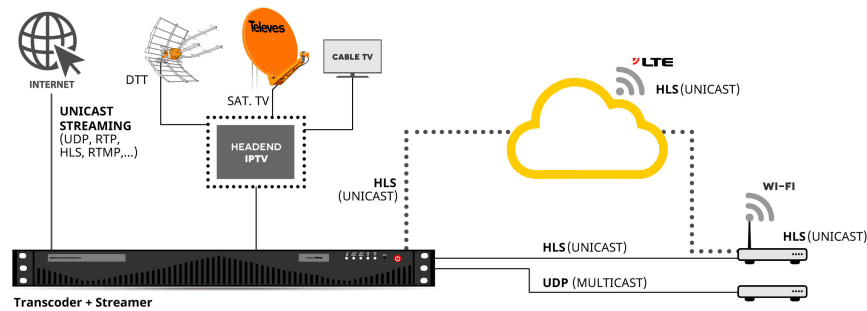

Tekniska specifikationer

Performance	Transcoding	Input			Output (H.264)		
		Channels	Codec	Resolution	Profiles	Resolutions	
		10	H.264	1080i@30	3	480p, 360p, 144p	
		10		720p@50	3	480p, 360p, 144p	
		15	MPEG2	PAL / NTSC	3	480p, 360p, 144p	
		10	H.264	1080i@25	3	480p, 360p, 144p	
		8		1080i@25	4	720p, 480p, 360p, 144p	
		Input			Output (MPEG2)		
		Channels	Codec	Resolution	Profiles	Resolutions	
		9	H.264	1080i@25	1	1080i	
		11		720p@50	1	720p	
		9		1080i@30	1	1080i	
	Streaming	Maximum: 3x 1Gbps interfaces					
		Users per interface		Total users	Output quality		Bit rate per user
		225		675	480p		4 Mbps
		250		750	404p		4 Mbps
450		1350	404p		2 Mbps		
375		1125	360p		2 Mbps		
900		2700	144p		1 Mbps		

Hardware Description	Frame	Dimensions	
		437 x 43 x 287mm	
		Weight	
		4,99kg	
		Cooling	
		4 high-efficiency fans	
	Network connections	4 GbE ports	
	Power Supply	200W AC 100-240V 50/60Hz 16 -0,1A	
		Energy performance certification	
	Average power consumption	Gold	
		120V / 0,8 - 1A	
	Average power consumption	230V / 0,4 - 0,6 A	