

Televes reserves the right to modify the product

## Lower section pivoting, Hot-Dip Galvanizing

### 180 tower

3m lower section pivoting for the erection of a 180 tower.  
Guy wires are required for pivoting sections.

Ref.303701

Art.Nr

TFUSS180FV

EAN13

8424450167052

### Highlights

- Anchoring system with union nuts
- Easy and quick mounting
- Fully automated soldering
- 180 tower maximum height: 26.5m (as per calculation conditions)


### Main features

- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Grey finish

### Additional information

(Click to see the picture)

Mounting details

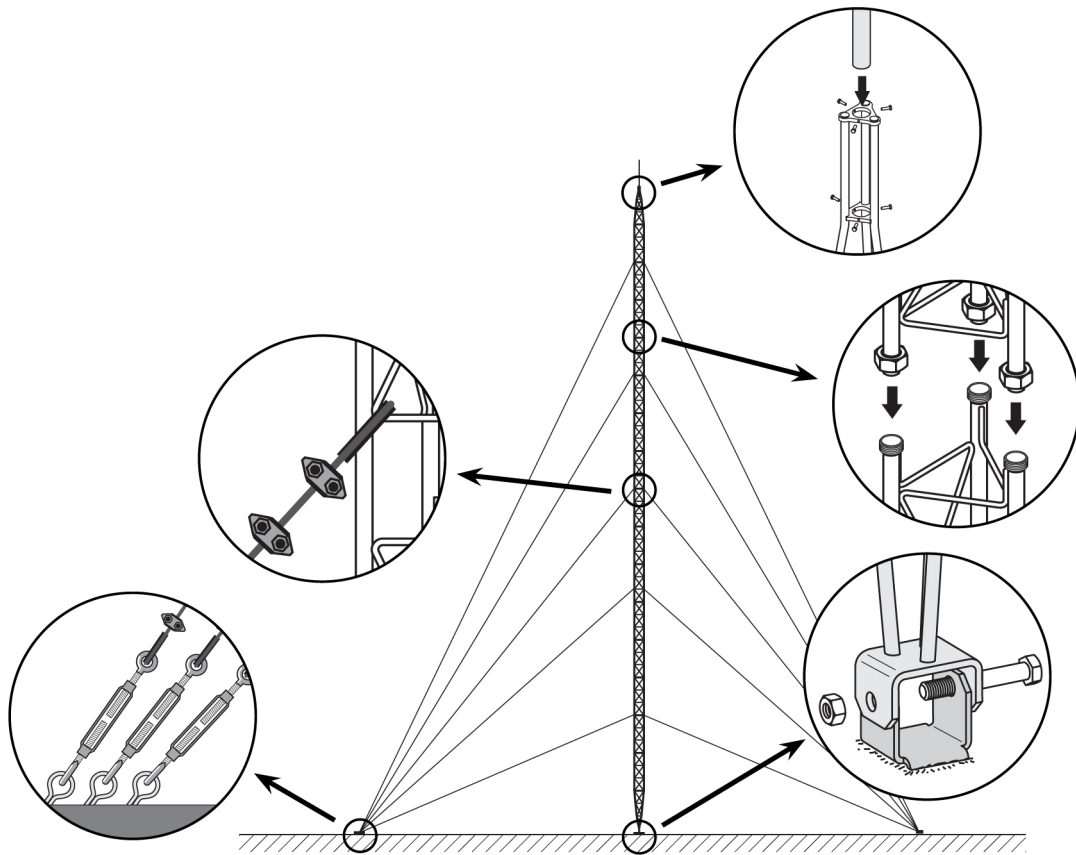

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

## Technical specifications

---

Surface facing the wind

0,27 m<sup>2</sup> x 1,2 coef. = 0,273 m<sup>2</sup>