



*Televes reserves the right to modify the product*

## Top mast holder, Hot-Dip Galvanizing + Painting 550 ULTRA tower - Reinforced

Steel mast holders are reinforced to support configurations of significant height (200 m approx.) or subject to high loads and adverse weather conditions.

**Ref.313810**

**Art.Nr**

TOBER550XL

**EAN13**

8424450181249

### Highlights

- Anchoring system based on plates and union nuts
- Outstanding stiffness and mechanical strength
- Solid tube, no internal corrosion
- Maximum height of the 550 ULTRA tower: 200 m (as per calculation conditions)


### Main features

- The hot-dip galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Colour paint, oven-lacquering with polyester electrostatic powder
- Mast max. diameter: 62mm

### Additional information

(Click to see the picture)

Mounting details

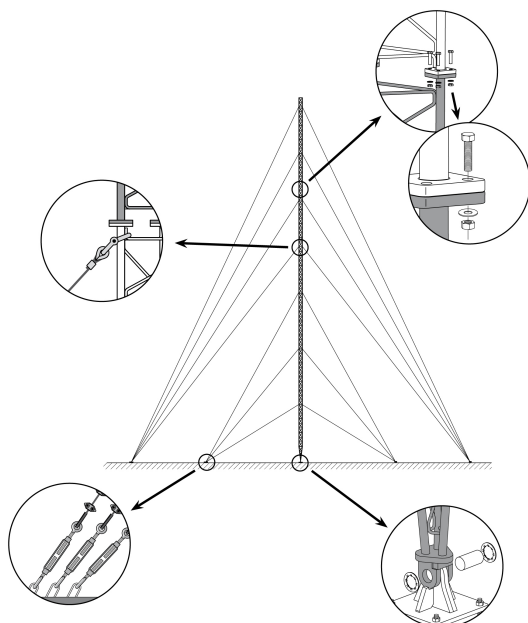

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

## Technical specifications

Surface facing the wind	m <sup>2</sup>	0.037
-------------------------	----------------	-------