Televes®



Televes reserves the right to modify the product

HR (High Rejection) LTE/5G filter 47...694 MHz (Ch.48), "F" connector

LTE/5G filters with high rejection against interference from channel 48 up. The built-in female "F" connector can be used to plug the filter straight into the equipment to be protected from interference.

Ref.403220

Art.Nr TSK48FQHRLTE **EAN13** 8424450209141

Highlights

- Plug-in format with integrated connector that adapts to any equipment
- Low insertion losses to avoid any impacts on the distributed signals


Main features

- Indoor installation
- Compact and light-weight size

Televes®

Application example

(Click to see the picture)

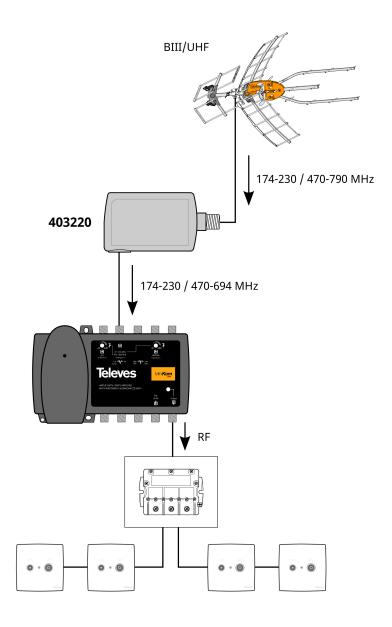

Televes®

Technical specifications

Rejected band	MHz	733 862
Rejected band attenuation	dB	> 25
Pass band	MHz	47 694
Pass band attenuation	dB	1
Number of inputs		1
Number of outputs		1
Connectors		"F" type
Operating temperature	°C	-5 45
Protection index		20