



Televes reserves the right to modify the product

Surge Arrester Accessory for BOSS antennas

To be inserted in the coaxial cable, just after the antenna, in order to redirect to ground any lightning strikes that could damage the antenna.

Recommended installation inside an outdoor housing attached to the mast (ref. 4163).

Ref.494702

Art.Nr


USS3000N

EAN13

8424450252277

Application example

(Click to see the picture)

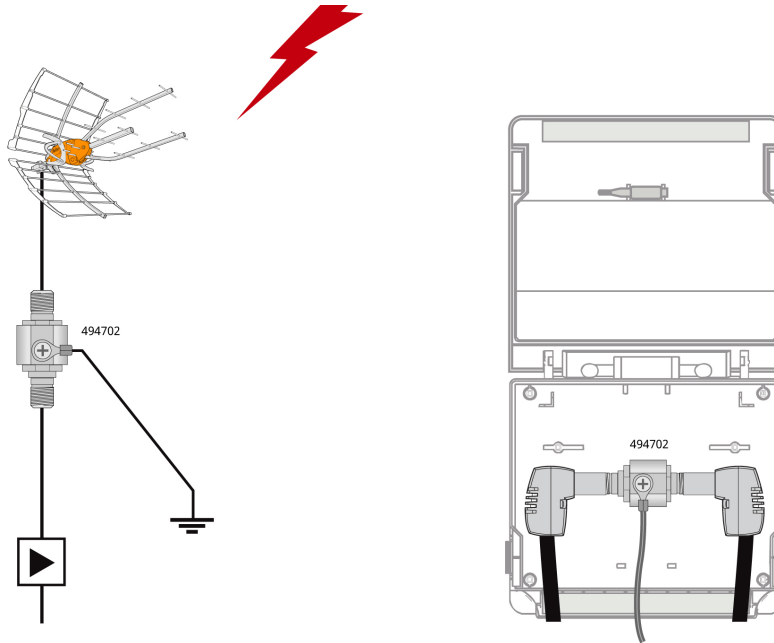

Technical specifications

Frequency margin	Mhz	0 - 3000
Insertion losses	dB	0.1 - 0.3
Discharge voltage	V	90
Max. peak power (PEP)	W (Br)	200
Max. discharge current	kA	10
Connectors		"F"
Impedance	Ohm	75
Operating temperature	°C	-40 ... 80