

SC/APC connectors

Optical fiber connectors



Televes reserves the right to modify the product

Ref.2329

Art.Nr

OSSCAPC


EAN13

8424450142592

Additional information

(Click to see the picture)

Mounting details

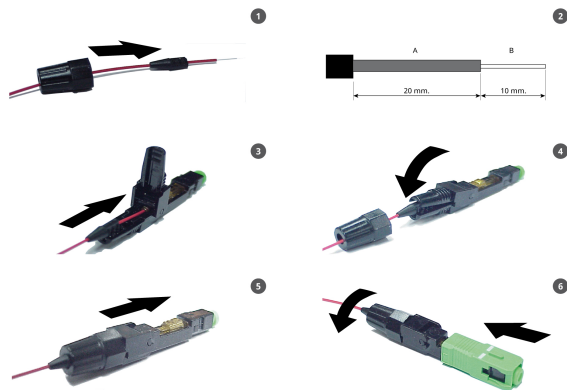

1. Insert the fiber through the threaded plastic cap and the rubber sleeve.
2. Strip the fiber (leaving a length of 20mm for a 250micras diameter and 10mm for the 125micras diameter) At this point, and before cutting the fiber with a high precision cutter (Ref.2323), be sure to clean the unprotected fiber with an isopropyl alcohol wipe (250 and 125 micras)
3. Insert the fiber into the connector housing, be

sure that the end of the fiber does not touch any part of the device, until it reaches the bottom.

4. Close the connector tab (in black), trapping the rubber sleeve (and therefore the fiber).
5. Move the connector slide switch (in yellow) to secure the fiber.
6. Screw in the plastic cap. Insert the green rectangular cap until it is secured (maintaining the same position as it is received).

