



*Televes reserves the right to modify the product*

## Noise generator 5...3000MHz

Device for measuring the satellite signal level using an acoustic or visual system.

It consists of an acoustic measurement system emitting a beep which frequency varies with the IF signal level, and a visual measurement system that has a pointer millivoltmeter with a scale where the IF level variations are read.

**Ref.593001**

**Art.Nr**

RG3000

**EAN13**

8424450171080

### Highlights


- 30-dB attenuated test output and regular output
- Thumbwheel that allows a  $10 \pm 2$  dB output level variation in both connectors
- Power LED indicator
- Connector for the simulator's external powering using a DC adapter
- Can be powered using a network adapter or from the meter, using an RF cable

### Main features

- Very limited size
- High-shielding Zamak chassis
- F connectors

## Application example

(Click to see the picture)

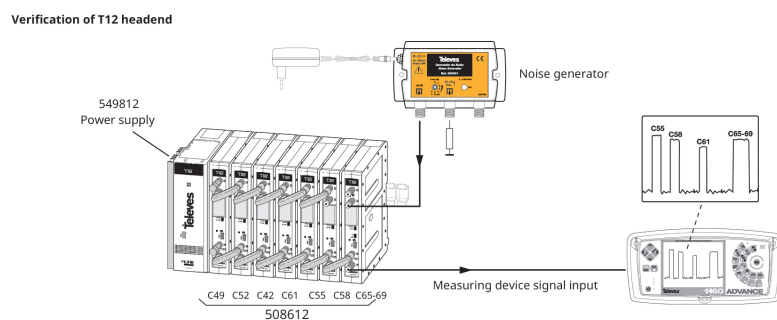

## Technical specifications

---

Frecuency range	MHz	5...3000
Maximum output level	dB $\mu$ V / dBmV	80 $\pm$ 3 (3 MHz) 20 $\pm$ 3 (3 MHz)
Output level regulator	dB	0...10
Power supply (external or via coaxial cable)	Vdc	12...18
Consumption	W	2
Output connector		"F" female