



Televes reserves the right to modify the product

1-output EDFA optical amplifier with WDM, 1RU rack 19"

1550 nm, Po 20 dBm

This device consists of an amplifier, a WDM, and a double power supply. It amplifies the 1550 nm optical signal producing an optical output power of 20 dBm. Based on EDFA (Erbium doped fiber) technology, it provides a high gain, a higher optical power and a low noise factor.

Equipped with WDM, it includes one 1310 nm/1490 nm-input that multiplexes the amplified 1550 nm-signal, providing one 1310 nm/1490 nm/1550 nm-output, making it suitable for video overlay distribution in medium size splitting GPON optical networks.

Ref.769630

Art.Nr

OV1U20WDMA1

EAN13

8424450224151

Highlights


- High-optical output power amplifier
- Equipped with WDM for the multiplexing of RF Overlay with GPON signals
- -10 dBm to +10 dBm input range
- Status LED indicators
- High-efficiency power supply
- Hot swappable double power supply: subscriber service is not interrupted

Main features

- 1RU for rack 19"
- Extended range (99-253 VAC) power supply
- Suitable for medium/large size optical networks
- SC/APC optical connectors

Application example

(Click to see the picture)

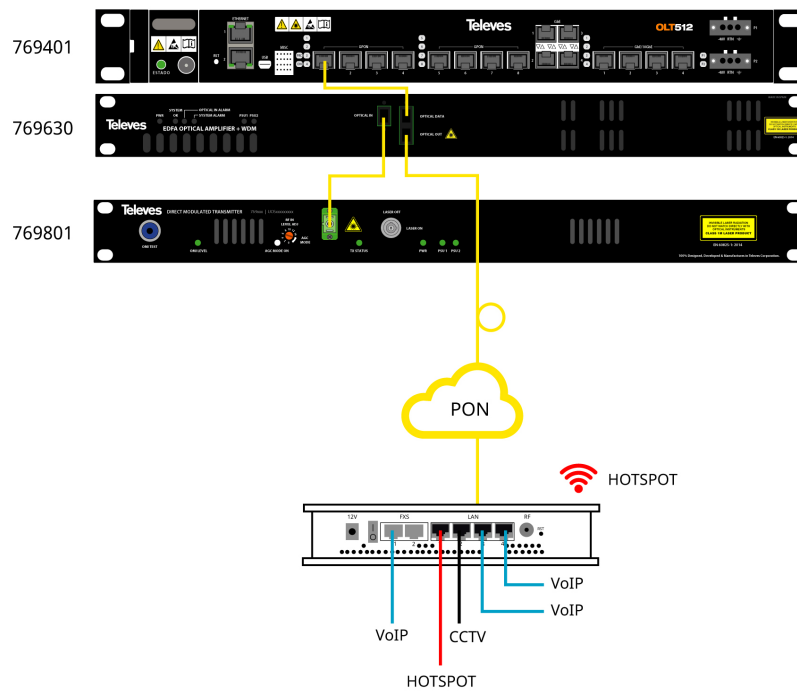

Technical specifications

OPTICAL	Número de puertos		1 RF Overlay @Optical IN 1 GPON @Optical DATA 1 (GPON+RF Overlay) @Optical OUT
	Longitud de onda	nm	1310±20 @ Upstream 1490±20 @ Downstream 1530...1565 @RF Overlay
	Input RF Overlay	dBm	-10...+10
	Output power RF Overlay	dB	1 x 20
	Noise figure	dB	5
	Insertion loss (1310nm & 1490nm)	dB	<1
	Return loss	dB	>40
	C/N / CSO / CTB	dB	51 / >65 / >65
	Input/output optical connectors		SC/APC
PSU	Mains voltage	VAC	99-253
	Mains frequency	Hz	50-60
	Max. input consumption	mA	110
	Maximum input power	W	5,5
GENERAL	Operating temperature	°C	-5...+45
	Protection index	IP	20