
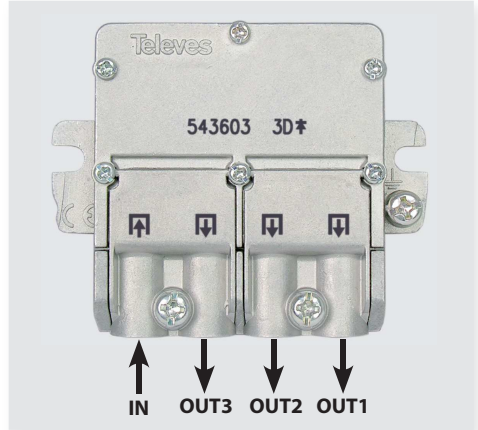


## Repartidores Easy-F / Repartidores Easy-F / Répartiteurs Easy-F / Splitters Easy-F / Делители Easy-F / Verteiler Easy-F

Refs. 543503, 543603

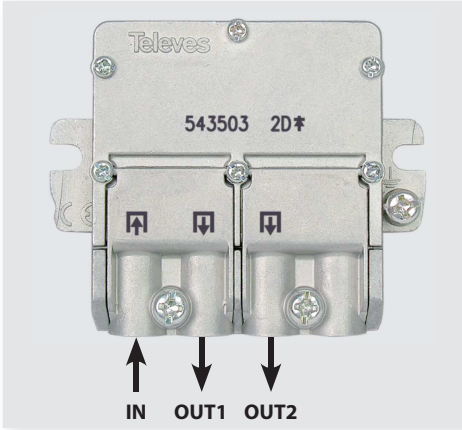

## Accesorio / Acessórios / Accessoires / Accessory / Аксессуары / Zubehör

Ref. / Мод.

Art. Nr. 4087



75 ohm

Технические характеристики	Spécificat. techniques	Caractérist. técnicas	Technische Daten	Característ. técnicas	Technical specificat.		543503	543603
Диан. частот	Marge fréquence	Margem frequência	Frequenzbereich	Margen frecuencia	Frequency range			
Аттенуация ВХОД - ВЫХОД1/ ВЫХОД2	Atténuation IN - OUT1/ OUT2	Atenuação IN - OUT1/ OUT2	Verteildämpfung IN-OUT1/OUT2	Atenuación IN - OUT1/ OUT2	Attenuation IN - OUT1/ OUT2	5 - 47 MHz 47 - 862 MHz 950 - 2400 MHz	4,4 4,3 4	8,5 8,5 7,5
Аттенуация ВХОД - ВЫХОД3	Atténuation IN - OUT3	Atenuação IN - OUT3	Verteildämpfung IN-OUT3	Atenuación IN - OUT3	Attenuation IN - OUT3	5 - 47 MHz 47 - 862 MHz 950 - 2400 MHz	- - -	5,5 5 4
Режекция между выходами	Réjéct entre sorties	Rejeição entre saídas	Entkopplung Ausgänge	Rechazo entre salidas	Rejection between outputs	5 - 862 MHz 950 - 2400 MHz	> 15 > 15	> 15 > 15
Макс. напряж.	Voltage max.	Tensão máxima	Max. Spannung	Tensión máxima	Maximum voltage			40
Макс. ток	Courant max.	Corrente máxima	Ausgänge-Eingänge DC-Pass	Corriente máxima	Maximum current	OUT → IN		300
Падение DC.	Chute tension	Queda de DC.	Spannungsverlust	Caída D.C.	Drop out voltage	OUT - IN		0,35 (typ) @150 mA
Вес	Poids	Peso	Gewicht	Peso	Weight			56
Размеры	Dimensions	Dimensões	Abmessungen	Dimensiones	Dimensions			57 x 47 x 13

