



Televes reserves the right to modify the product

Lower section pivoting, Zinc + RCP

180 tower

3m lower section pivoting for the erection of a 180 tower.
Guy wires are required for pivoting sections.

Ref.3037

Art.Nr

TFUSS180

EAN13

8424450136553

Highlights

- Anchoring system with union nuts
- Easy and quick mounting
- Fully automated soldering
- 180 tower maximum height: 26.5m (as per calculation conditions)


Main features

- Zinc coating + RCP
- Grey finish

Additional information

(Click to see the picture)

Mounting details

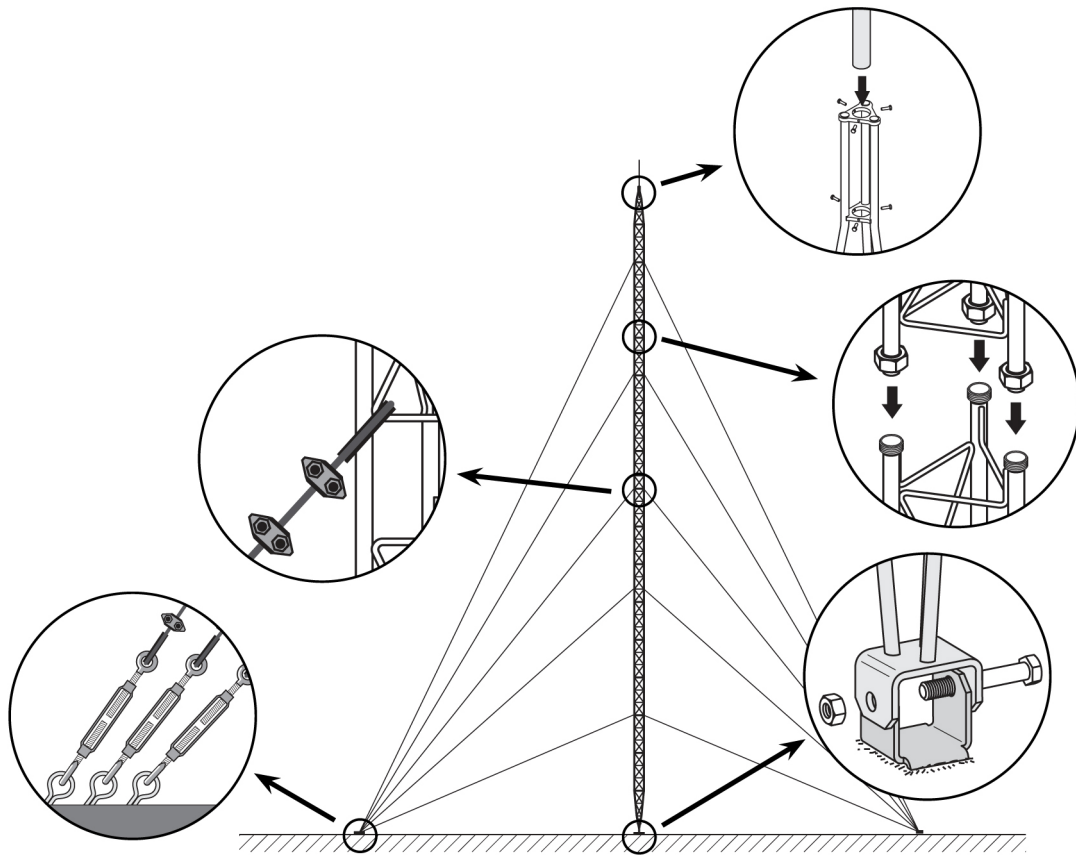

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

Technical specifications

Surface facing the wind

0,27 m² x 1,2 coef. = 0,273 m²